

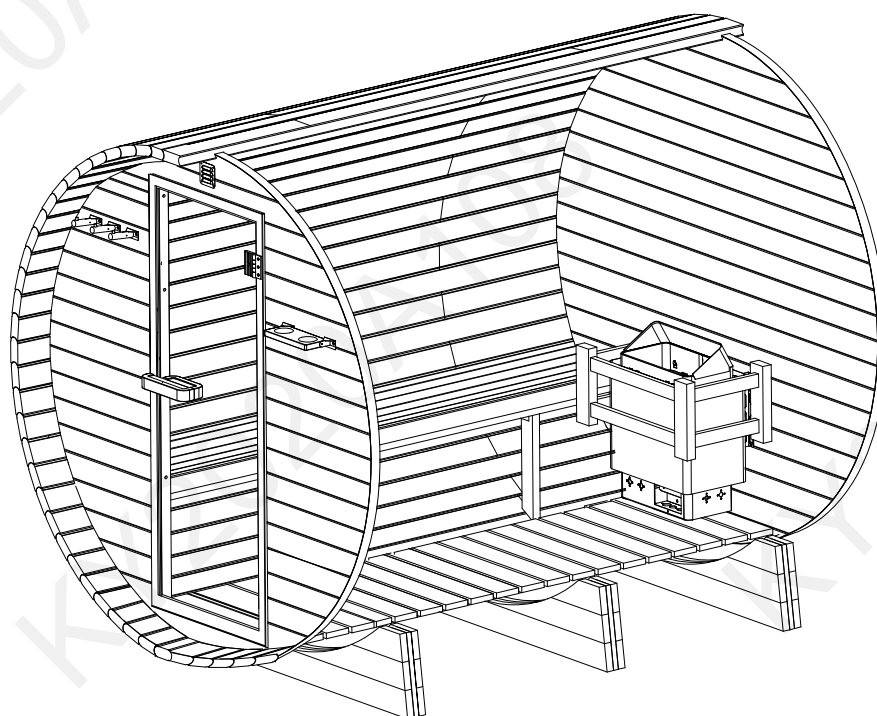
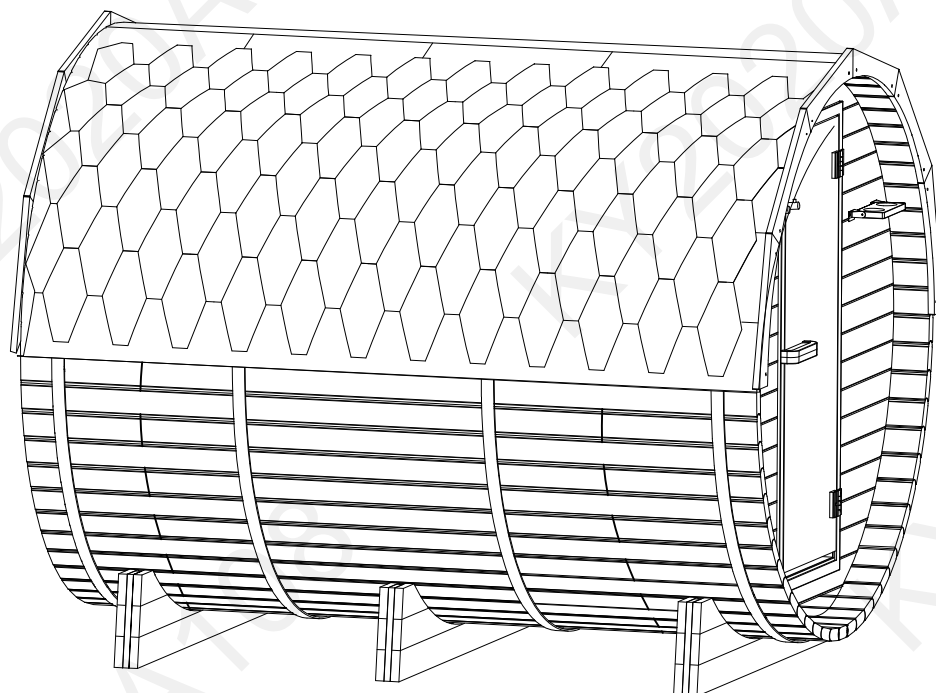


Splicing wall panel barrel sauna


FY-1821-1824EJ

FY(R)-1821-1824EJ

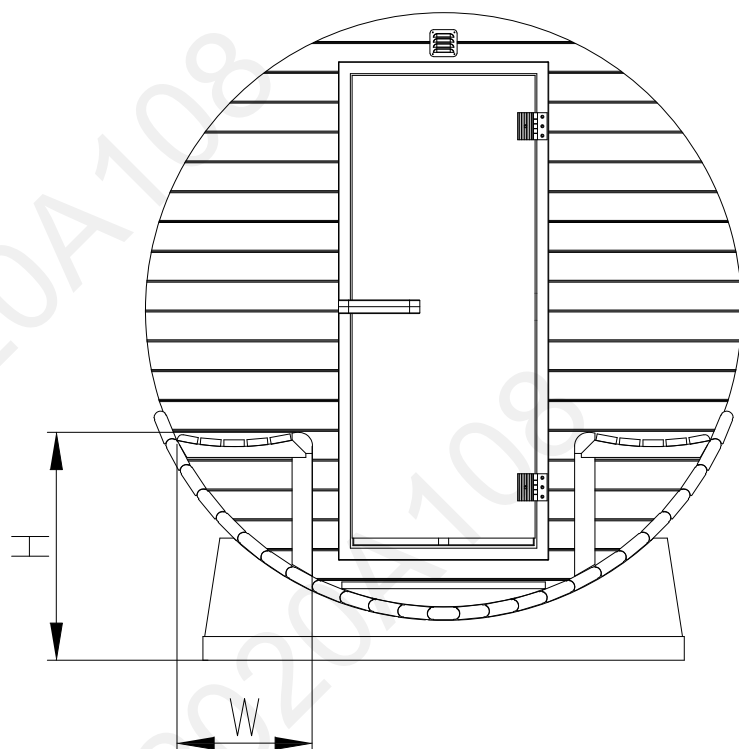


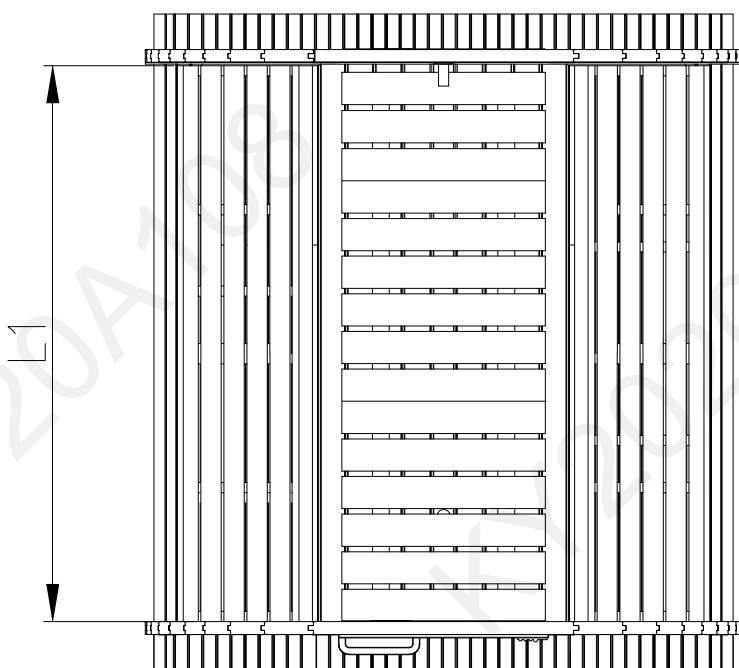

Name	Number	L1 (mm)	L2 (mm)	W (mm)	H (mm)
	1821	1910		400	640
	1824	2210		400	640

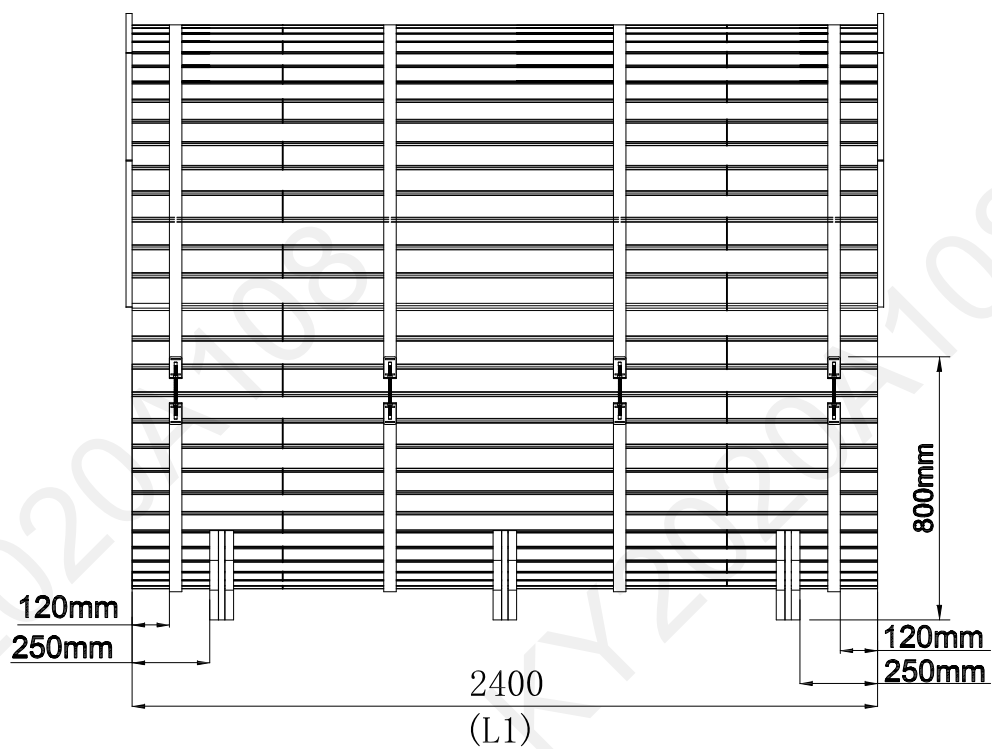

Name \ Number	L1 (mm)	L2 (mm)	W (mm)	H (mm)
1821	2100			
1824	2400			

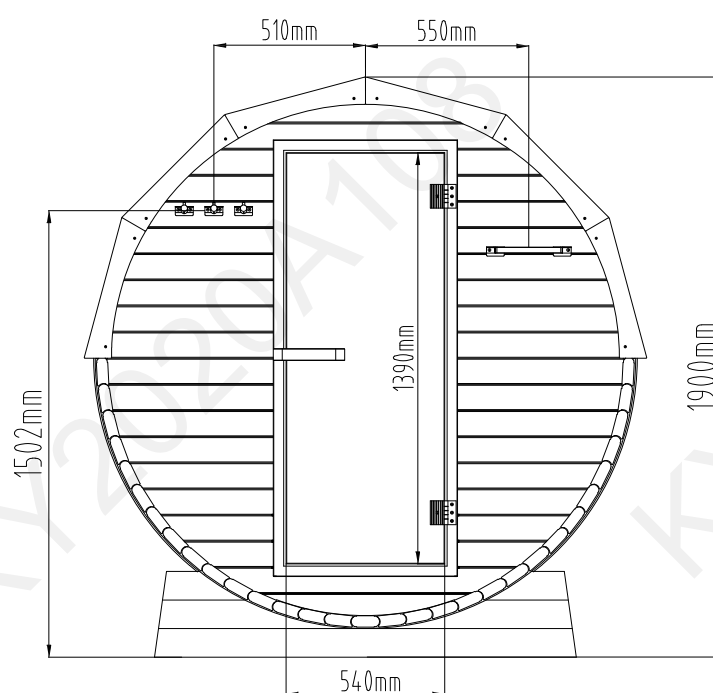


Special Note:


1. Sauna rooms are usually built with cork. Due to the special nature of the sauna room, protective coatings (paints, etc.) cannot be applied to the wood used in the sauna room. Therefore, the customized sauna room will be expanded during transporting and storing because its wood material absorbs the air's water. the wood shrinks by releasing moisture into the air (dry air). Therefore, it is normal for the horizontal size of the wood, especially the horizontal size of the jigsaw wood to have a certain error with the standard size on the drawing.
2. The sauna room could not be assembled in a rainy day.
3. After the sauna room is installed, it should be covered with rainproof cloth or covered with fiberglass asphalt shingles in time to prevent the wood used for the sauna room from being severely deformed and moldy due to the sun and rain.

1.


Installation example for 1824

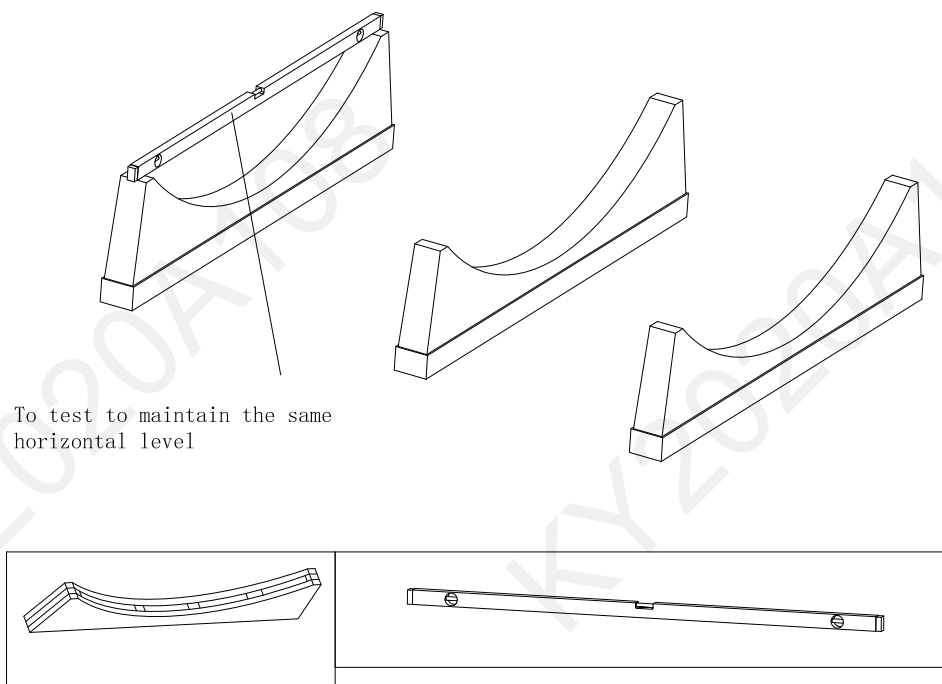


2.

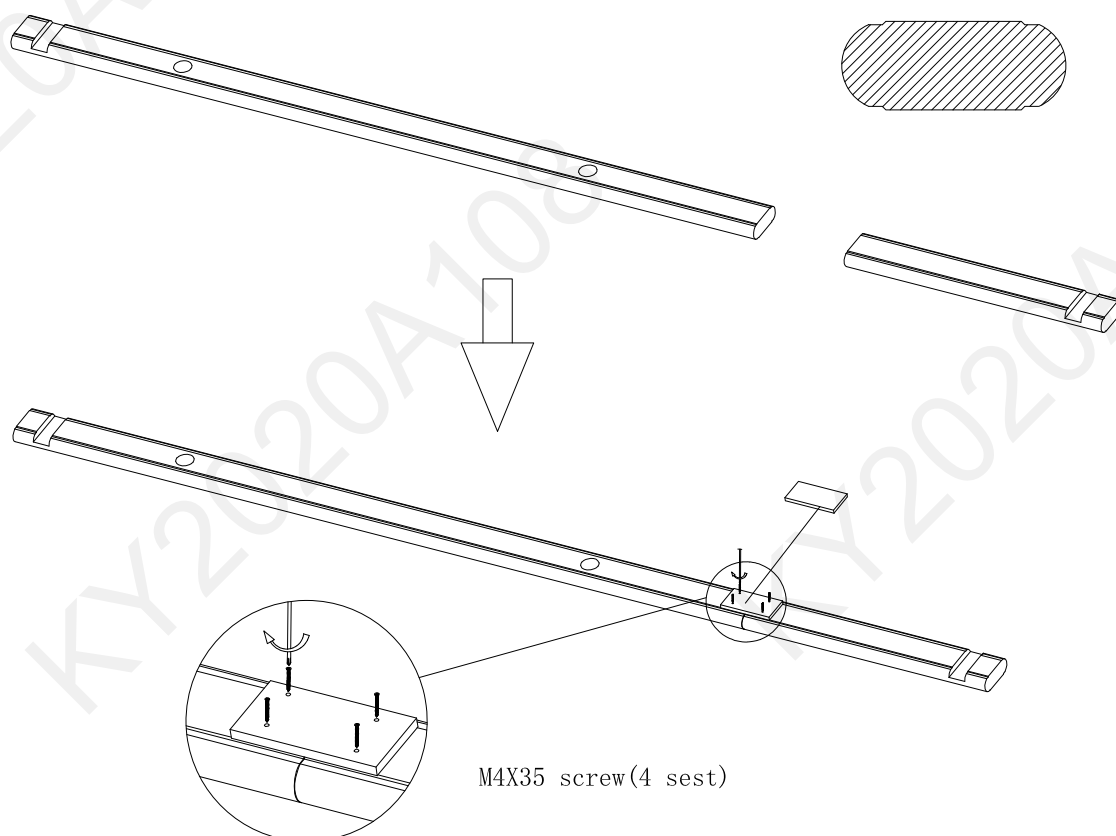


3.

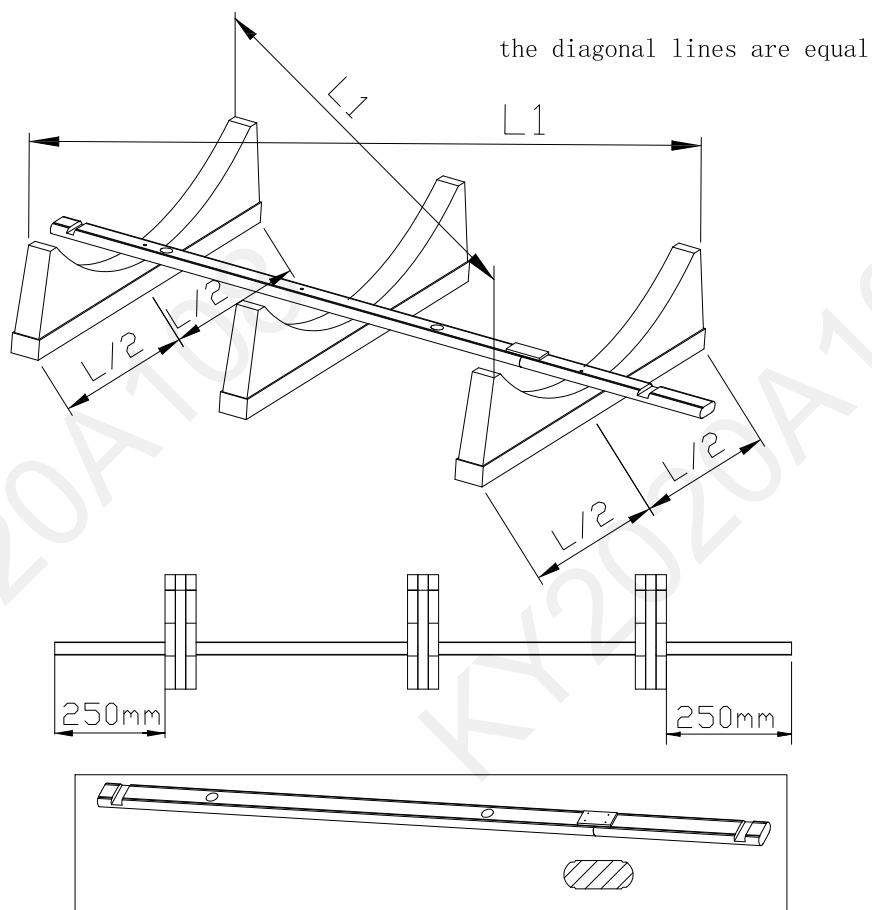


4.

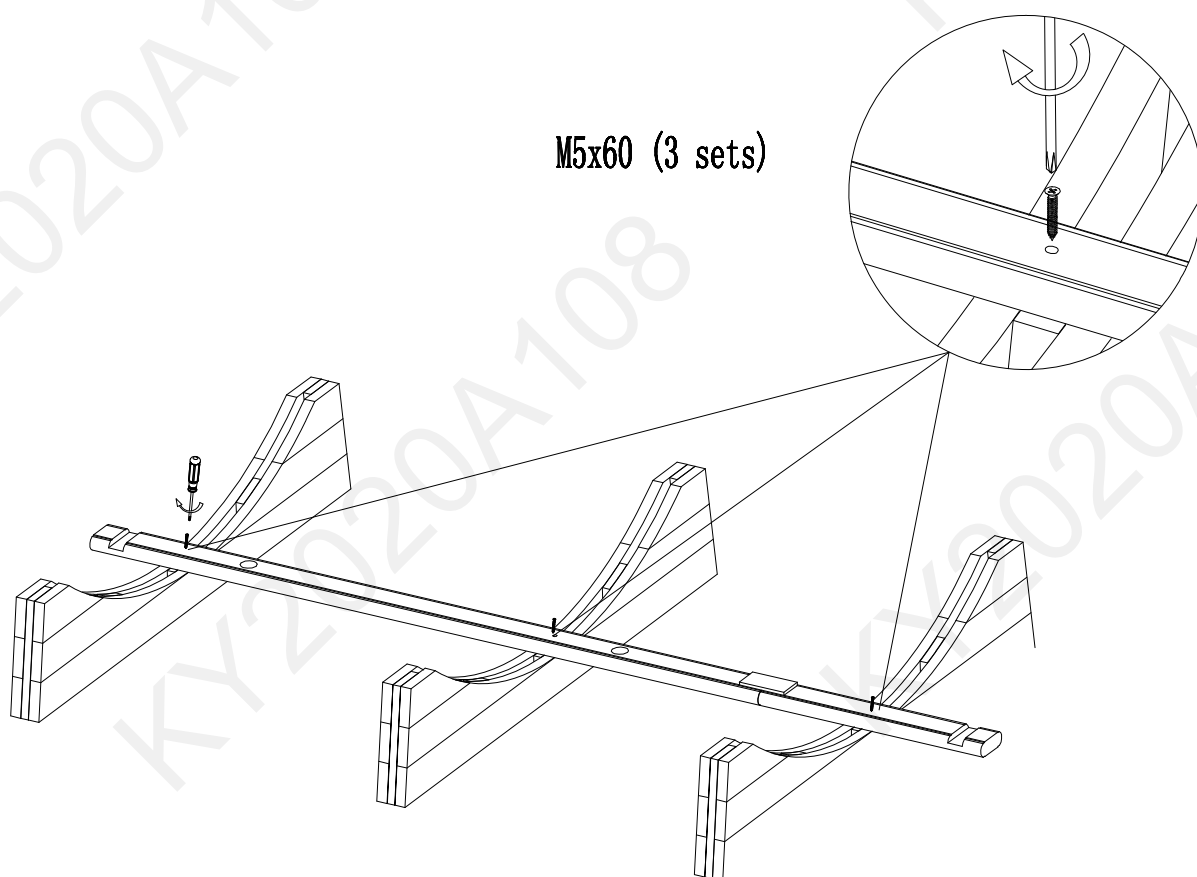


5.

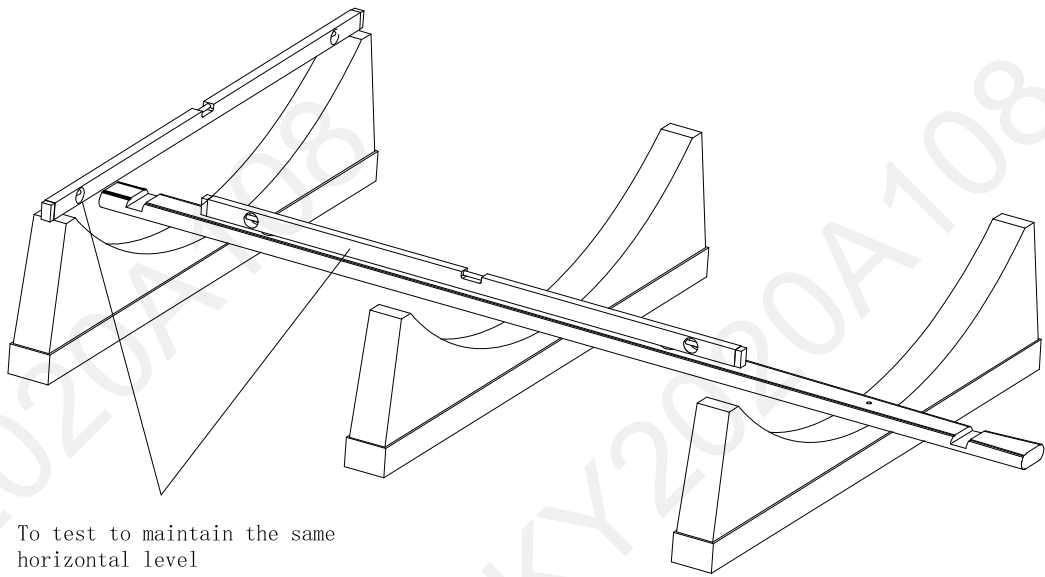


6.

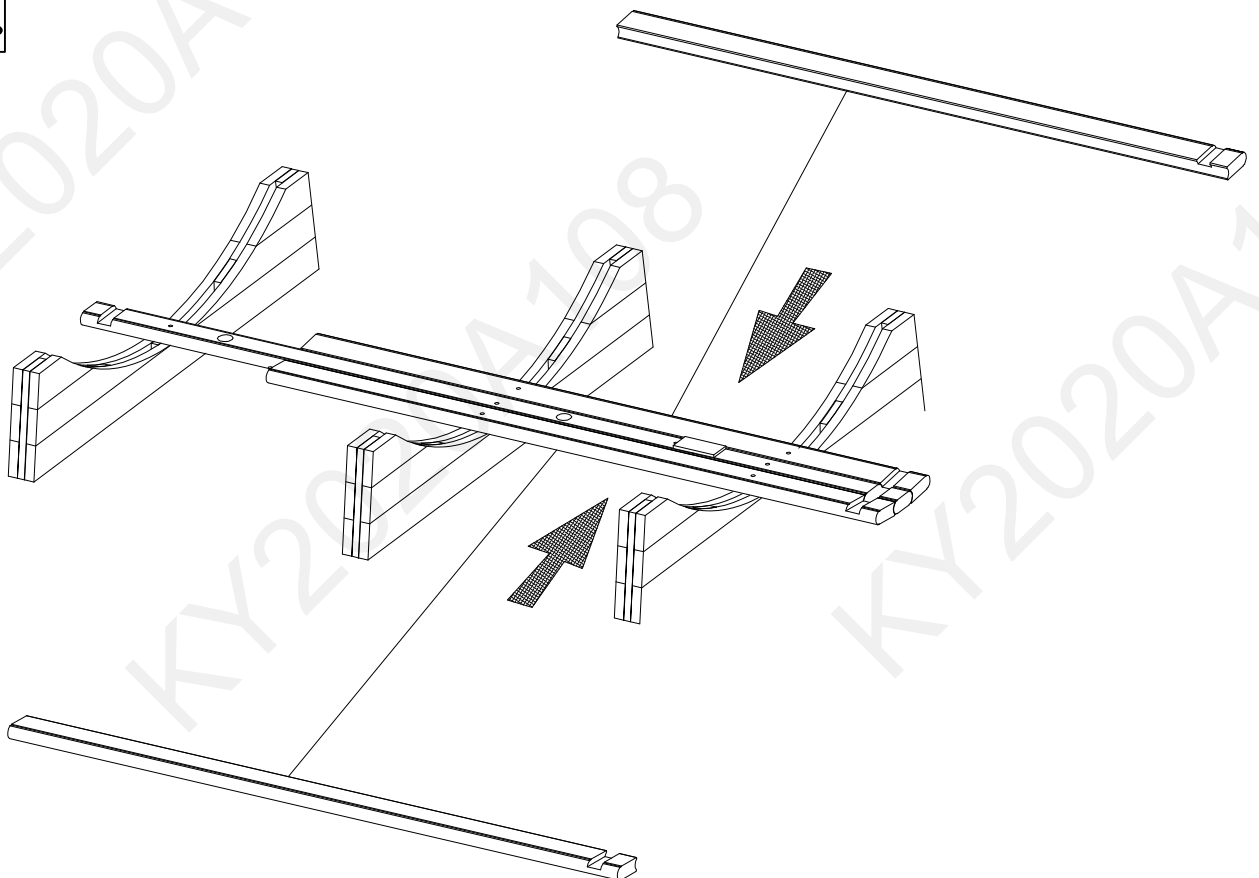


7.

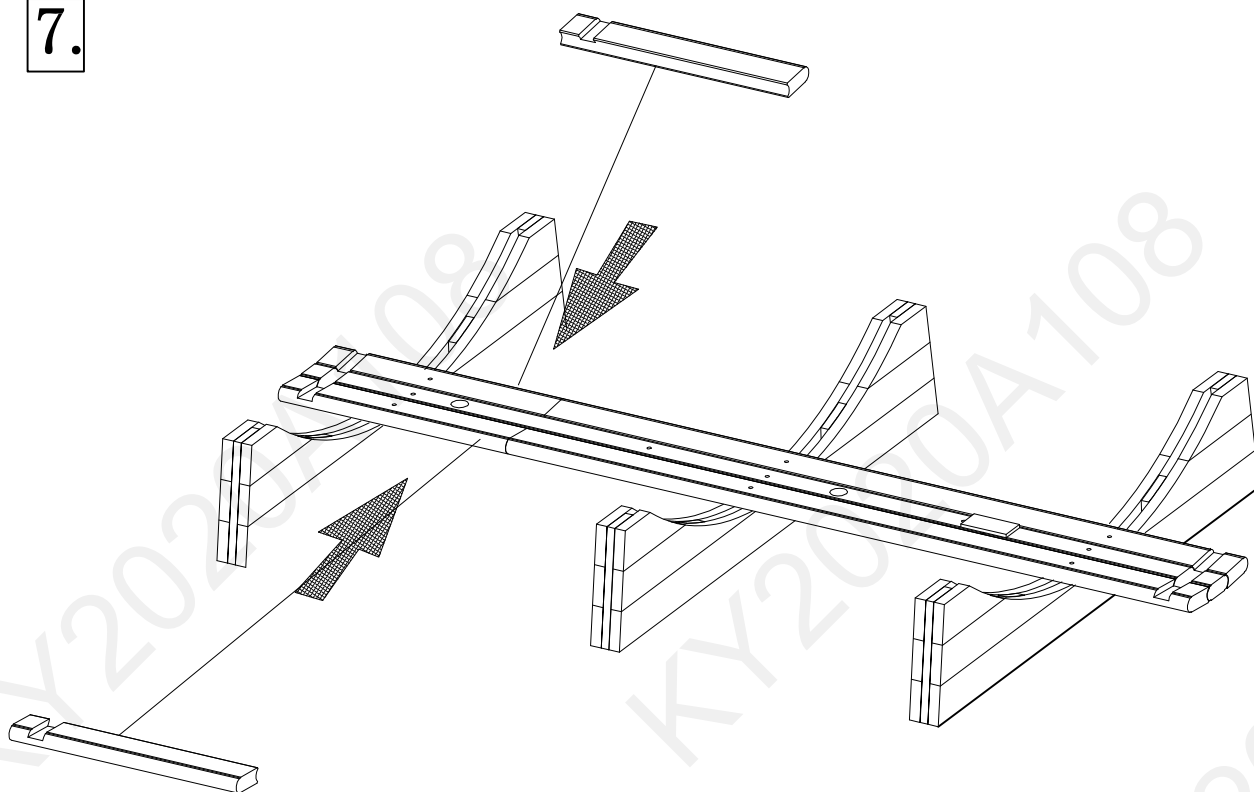


8.

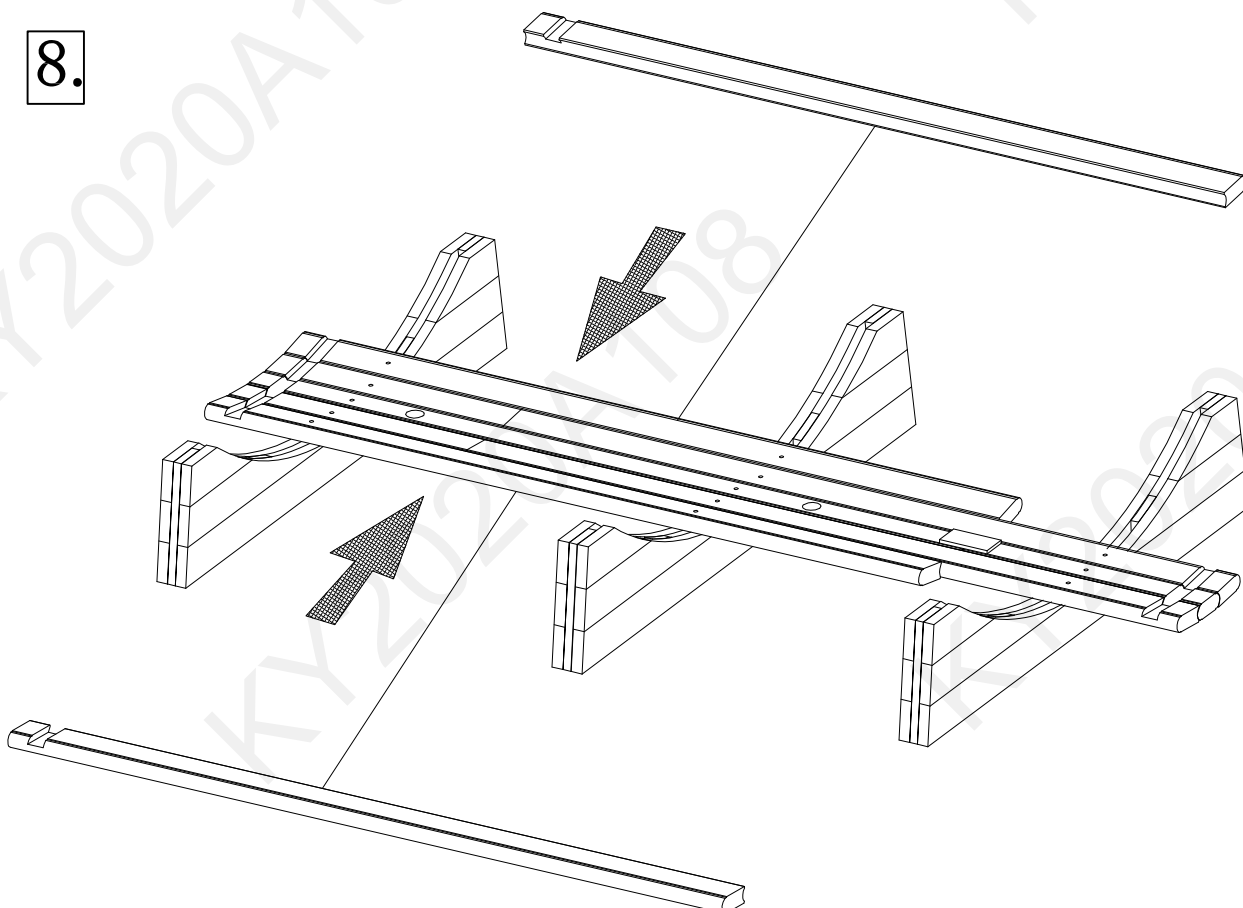


9.

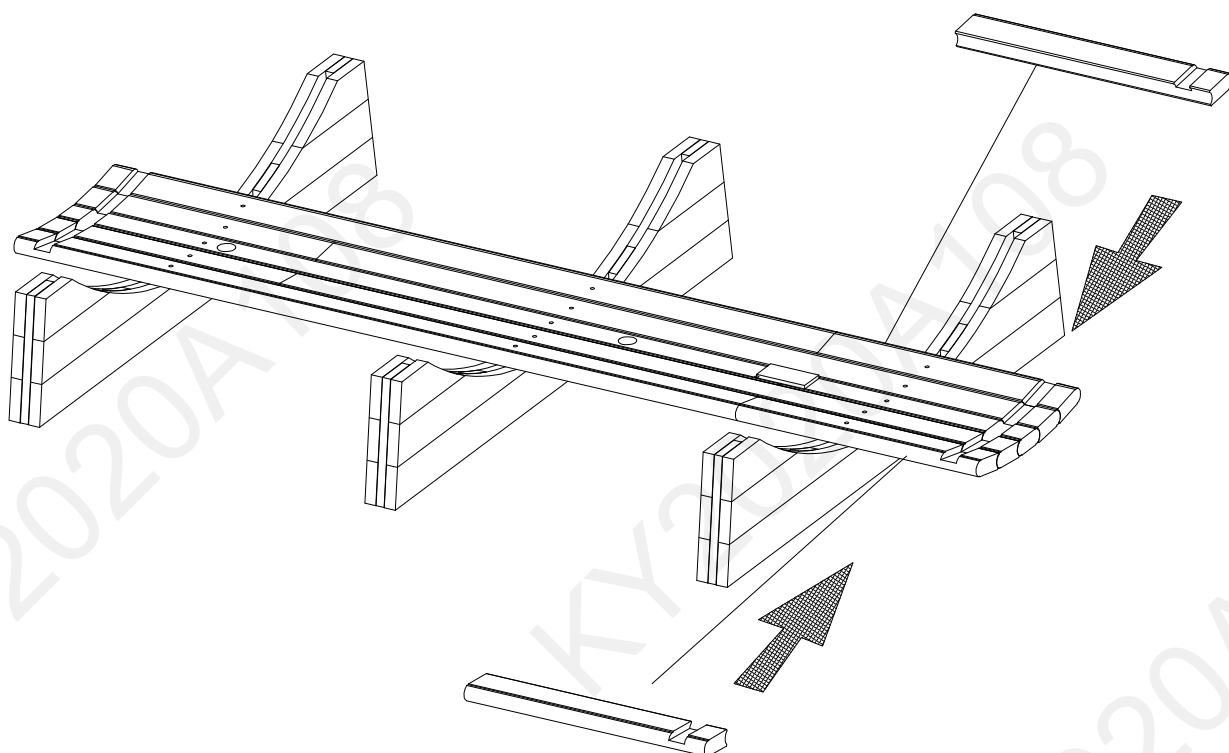


10.

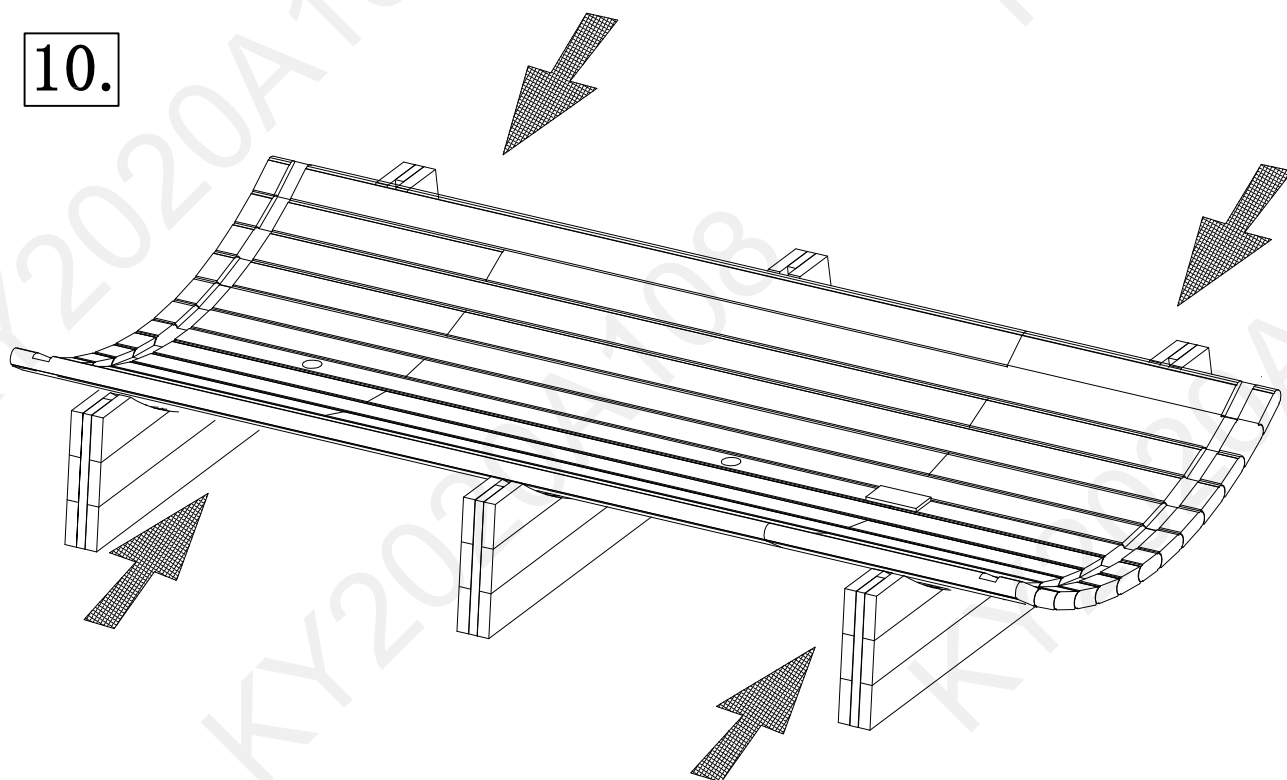

11.

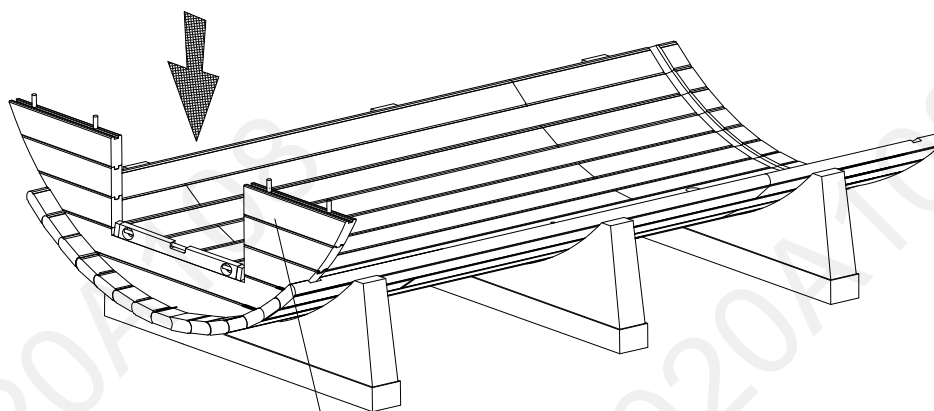



To test to maintain the same horizontal level

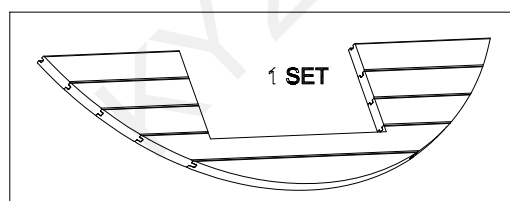


WALL PANELS
10-1

12.

M5x60 2sets

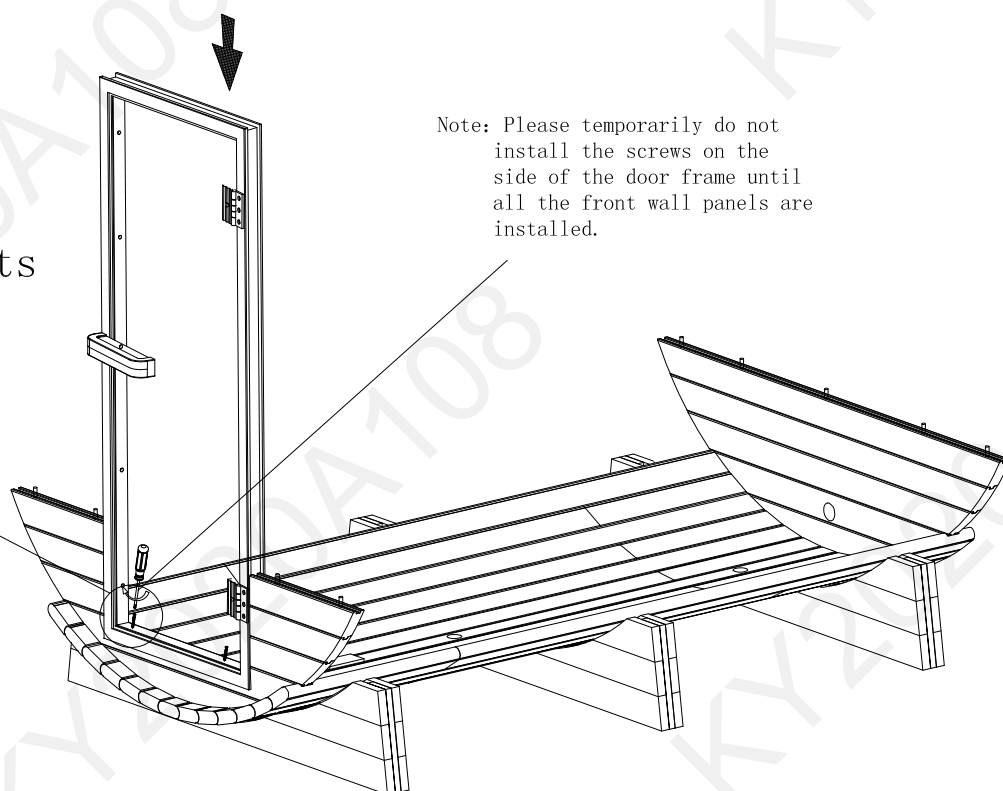


Note: Please temporarily do not install the screws on the side of the door frame until all the front wall panels are installed.

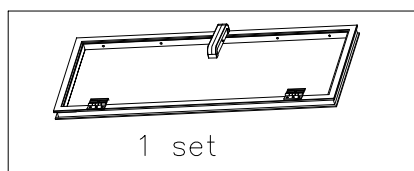


13.

To test to maintain
the same vertical level

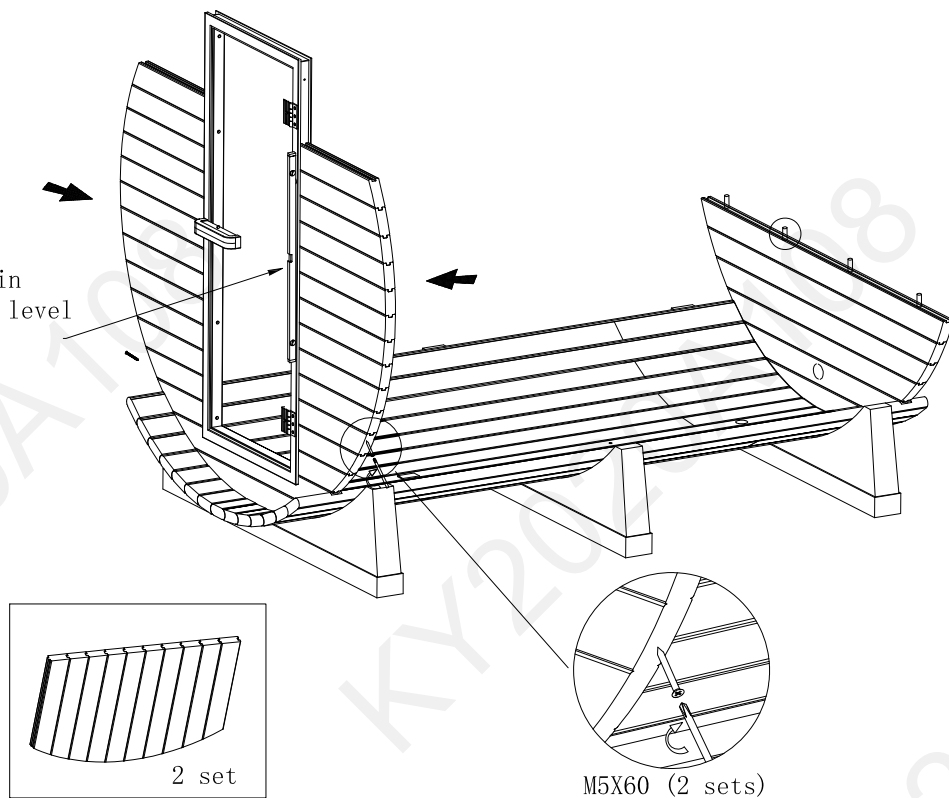

14.


SPARE SMALL WOOD STRIP,
INSERT IF THE GAP IS TOO LARGE

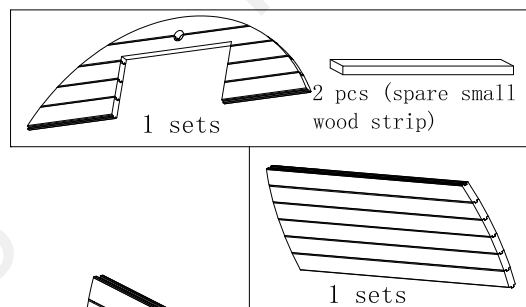


Special Note

Whether to insert wooden slats or the number of wooden slats to be inserted should be determined by the gap between the upper door frame and the wall frame.


15.

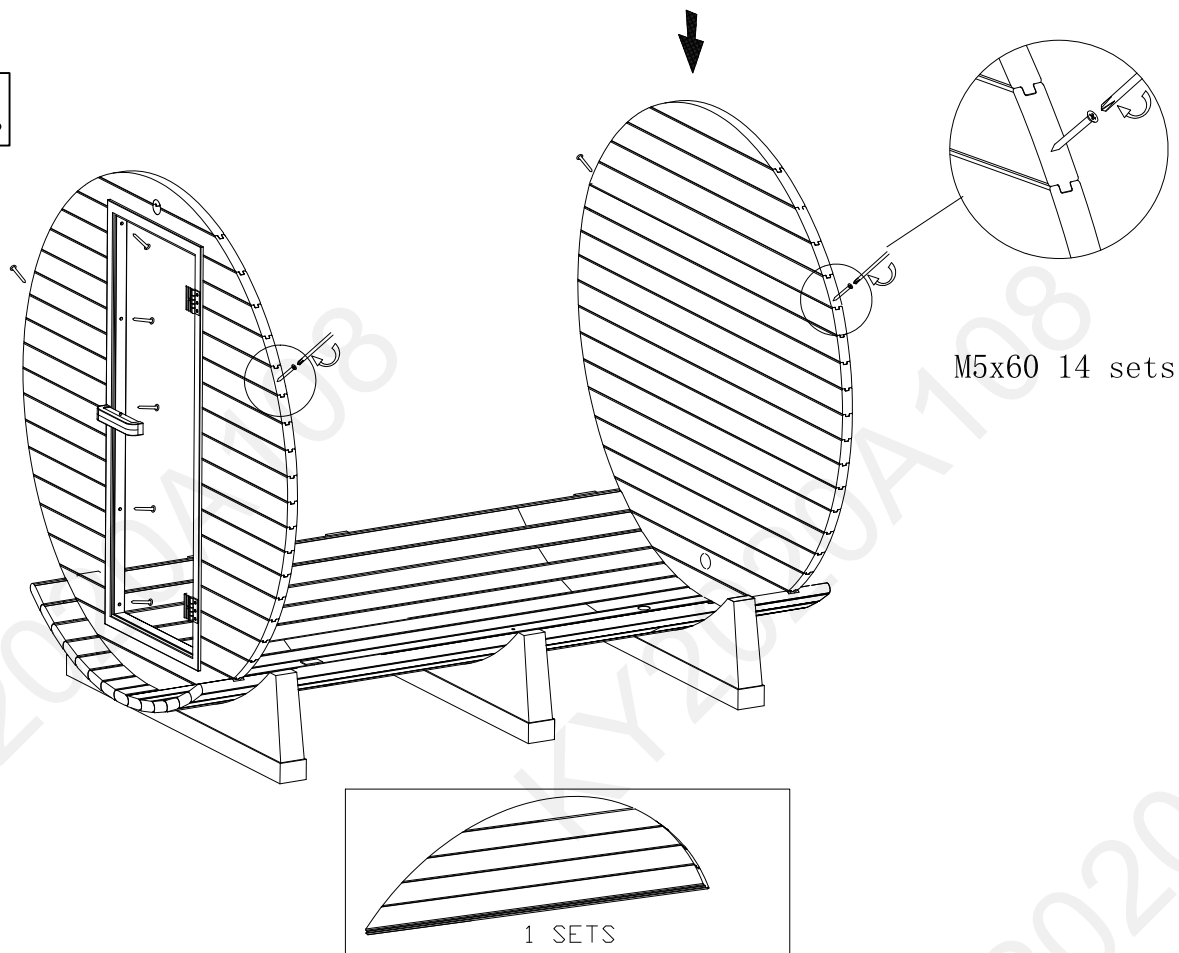


16.

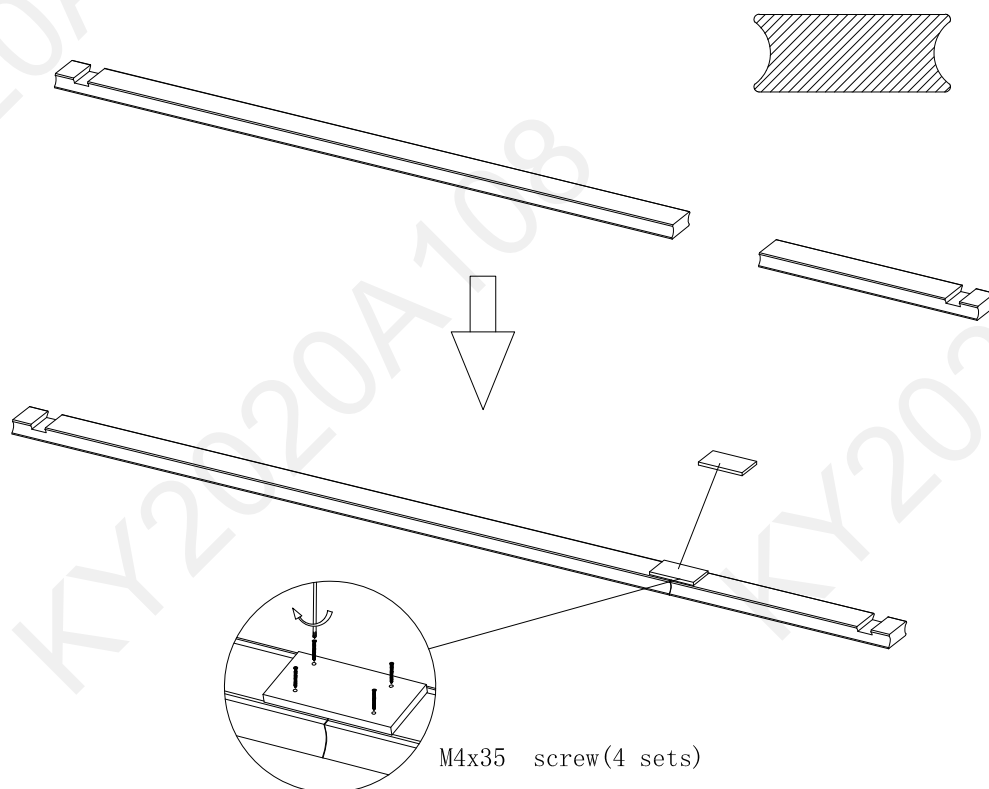


17.

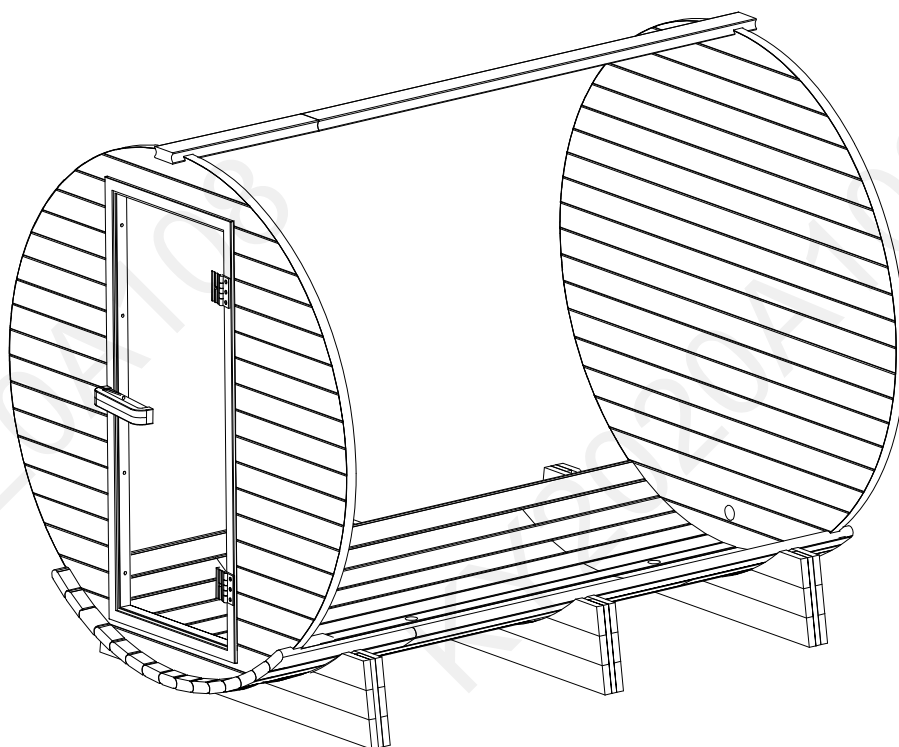


18.

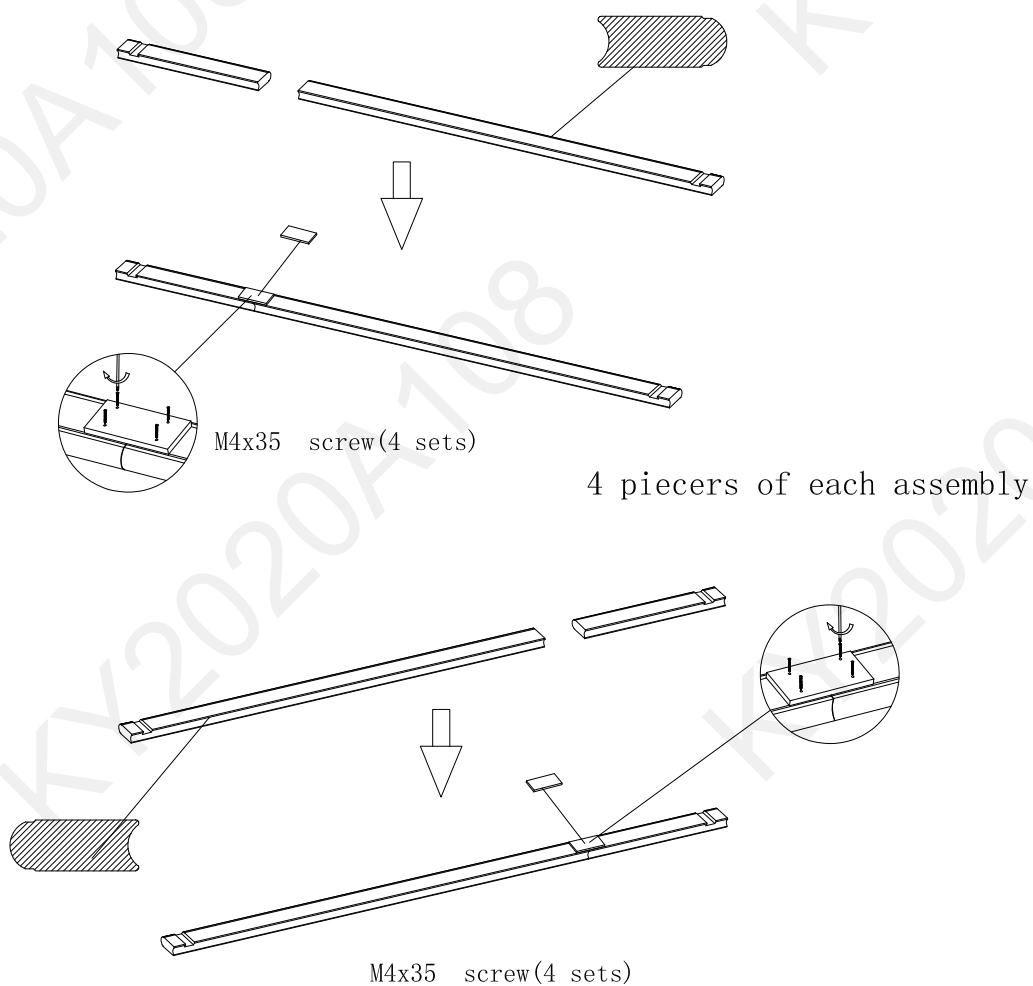

19.

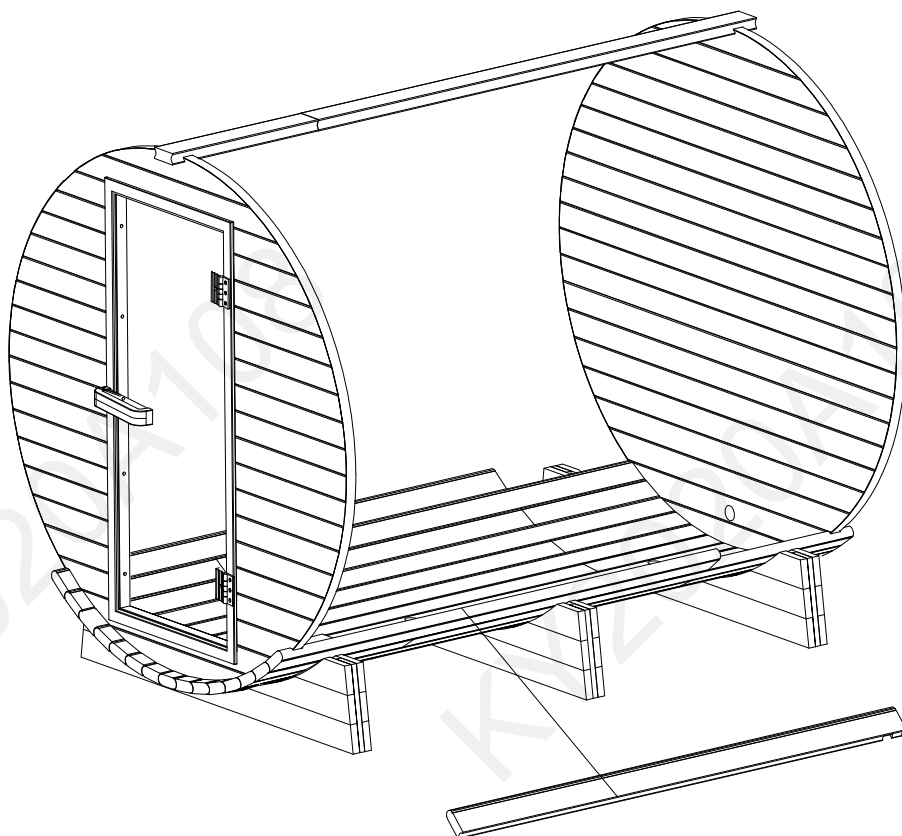


20.

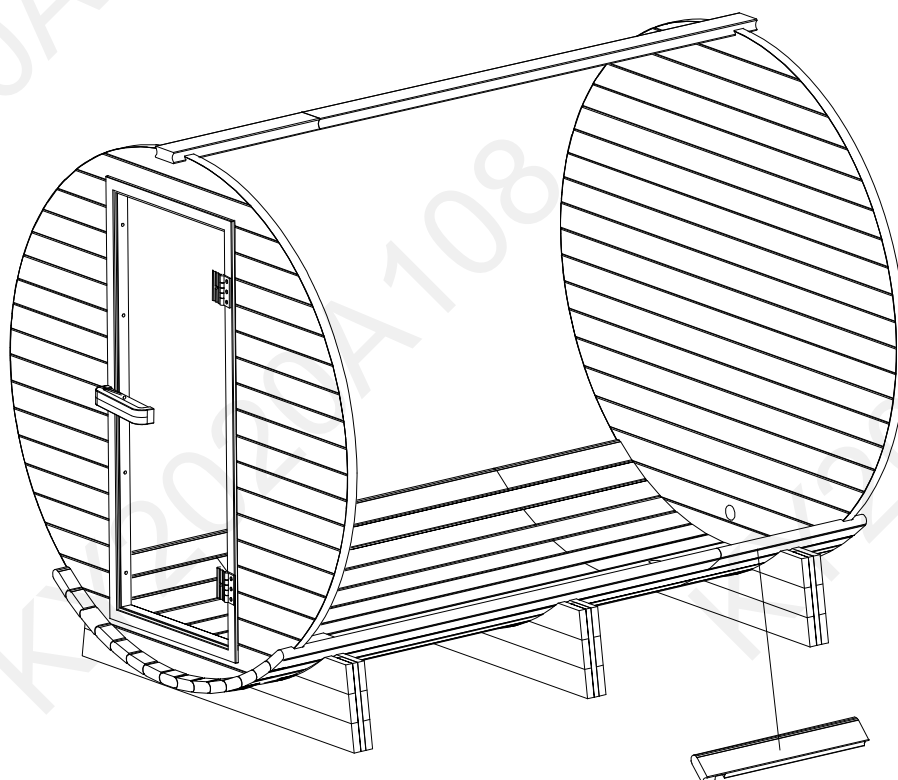


21.

The number of symmetrical mounting plates on both sides

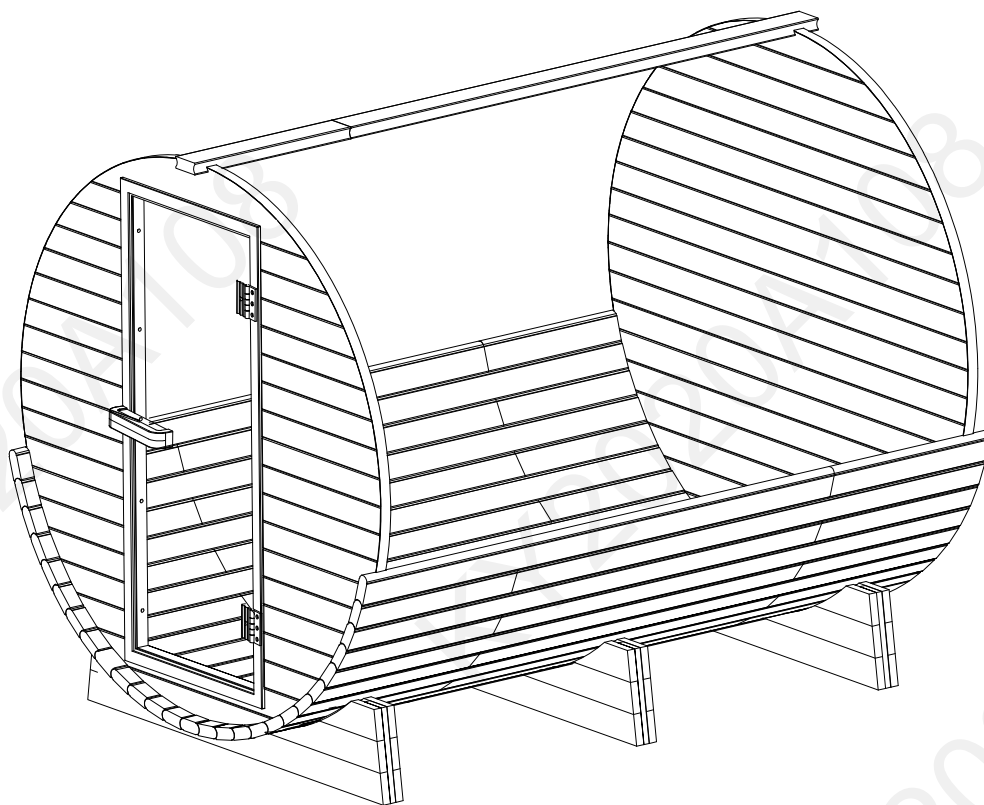


22.

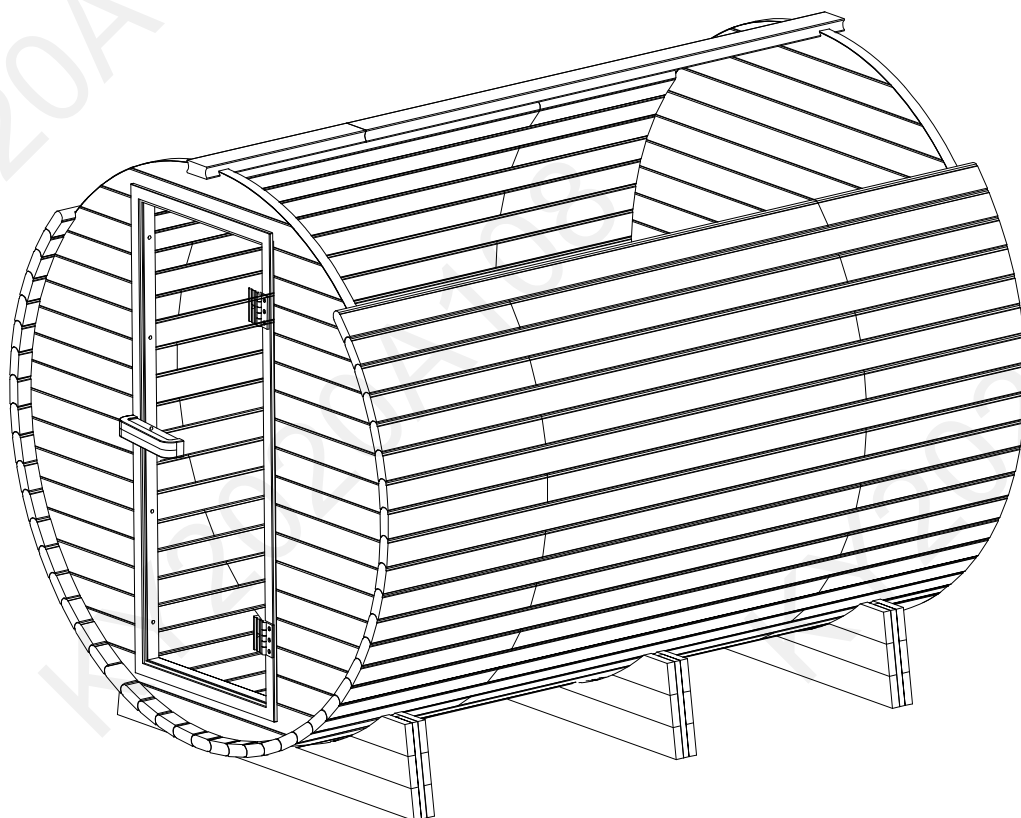


Start using a splice board


23.

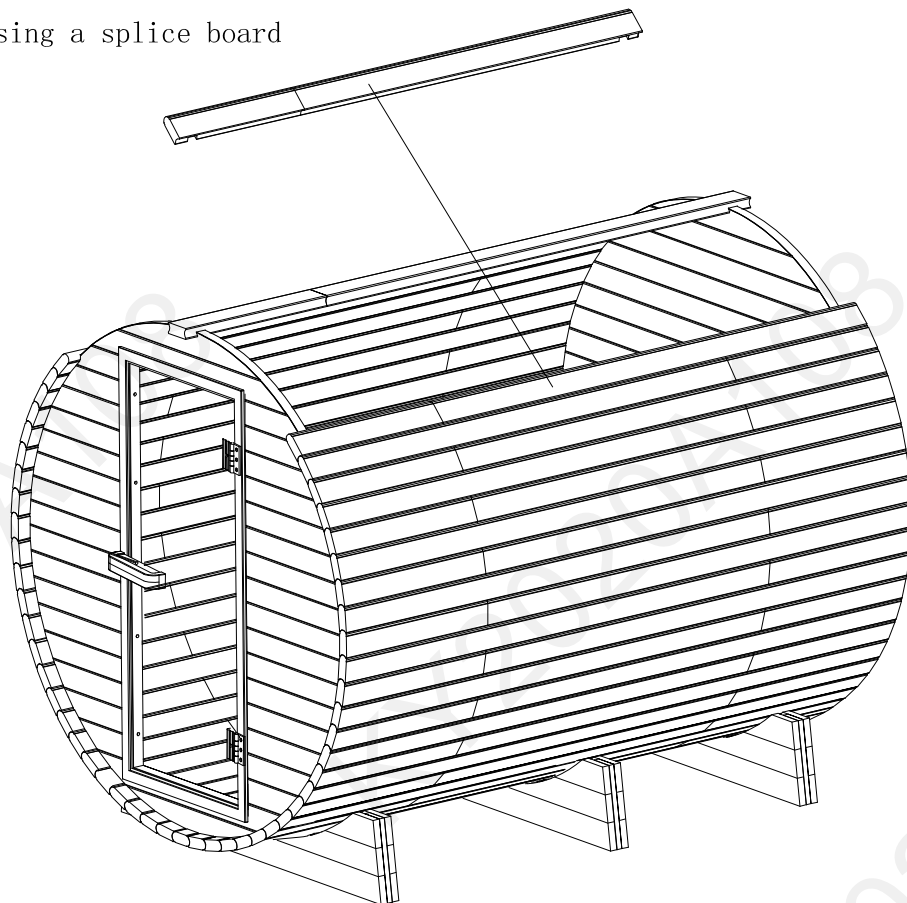


24.

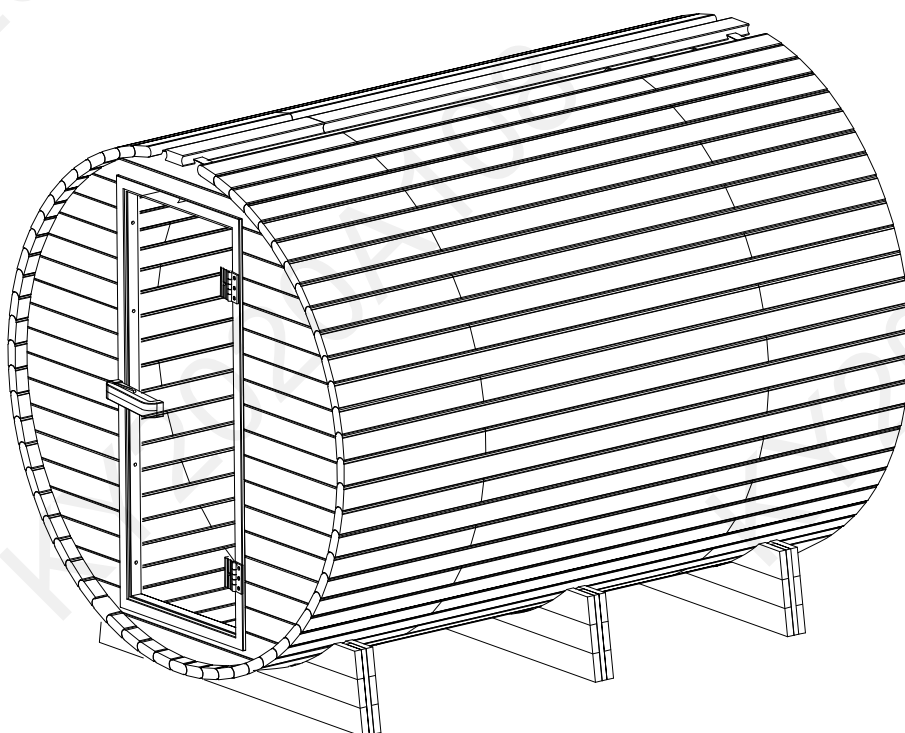



25.

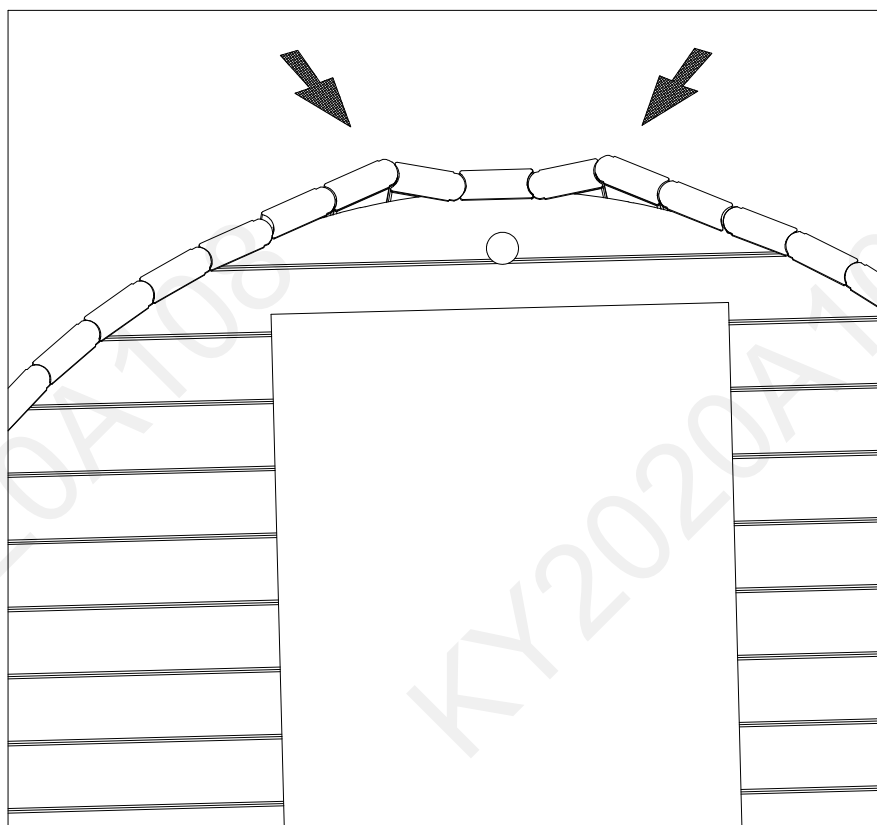


26.

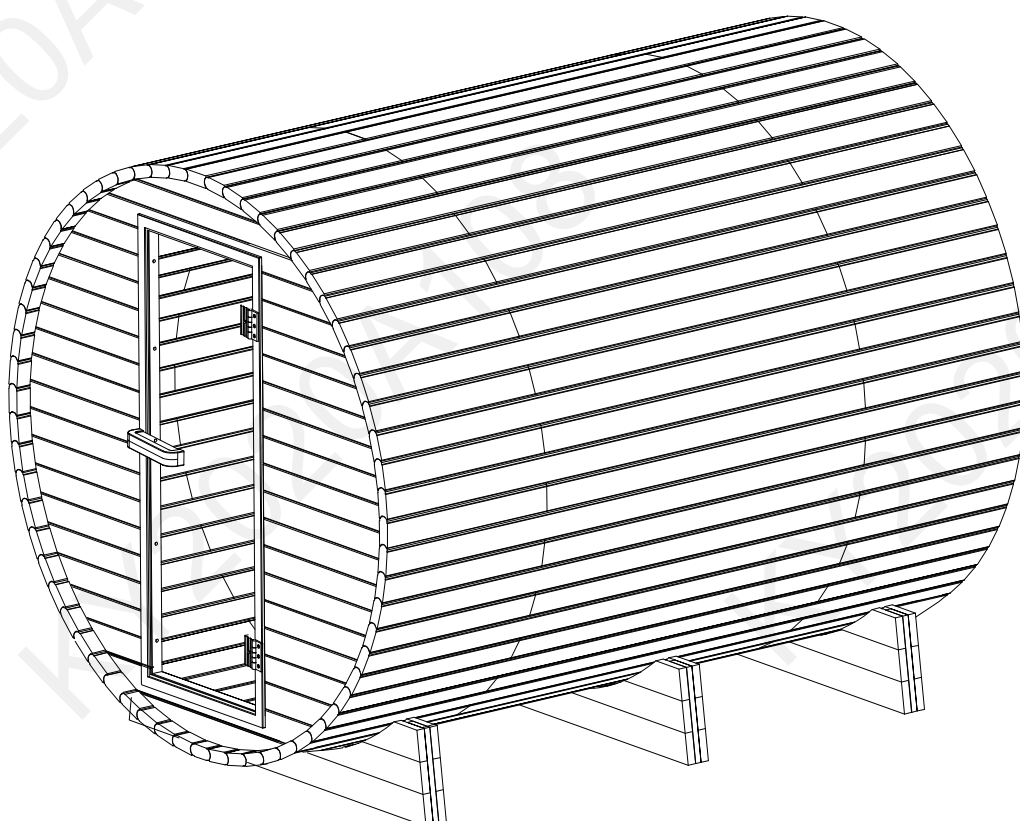


27.

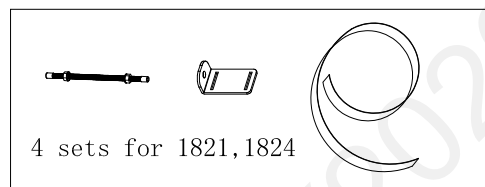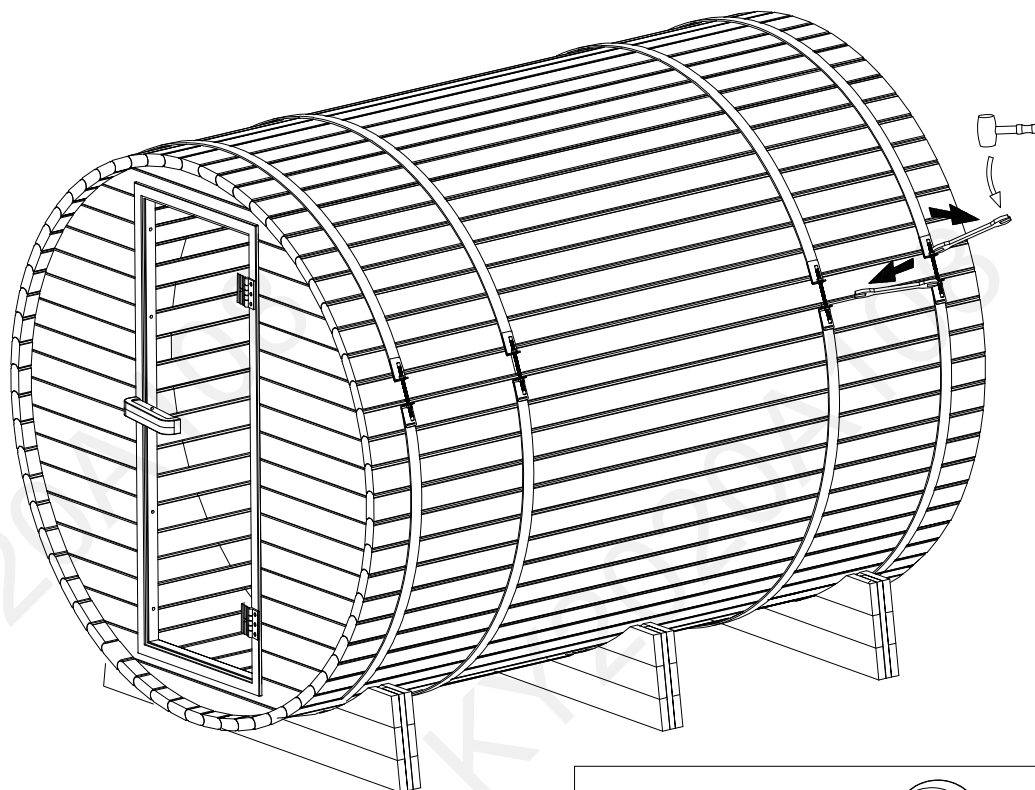


28.

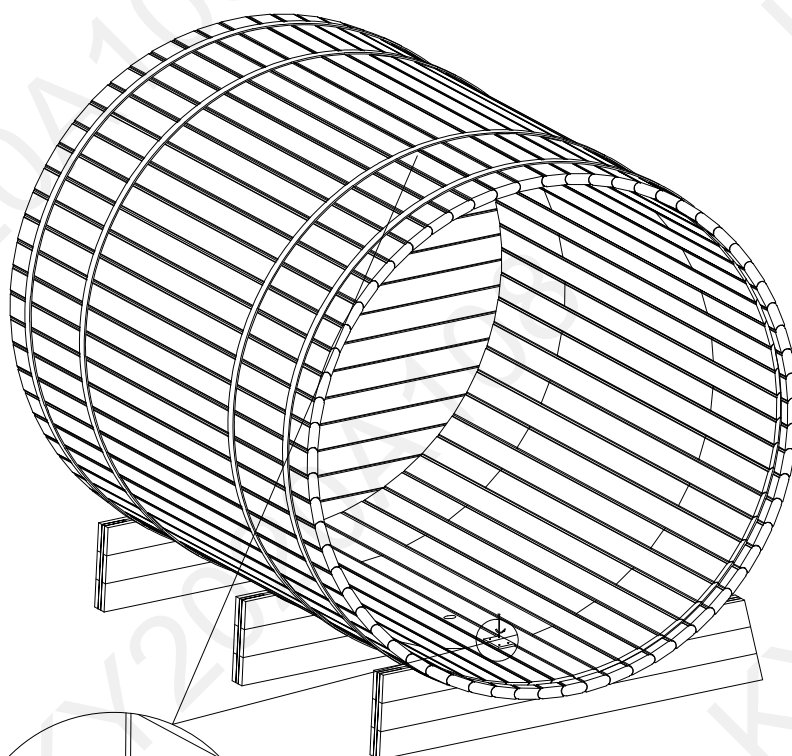

Remove splicing plate




29.

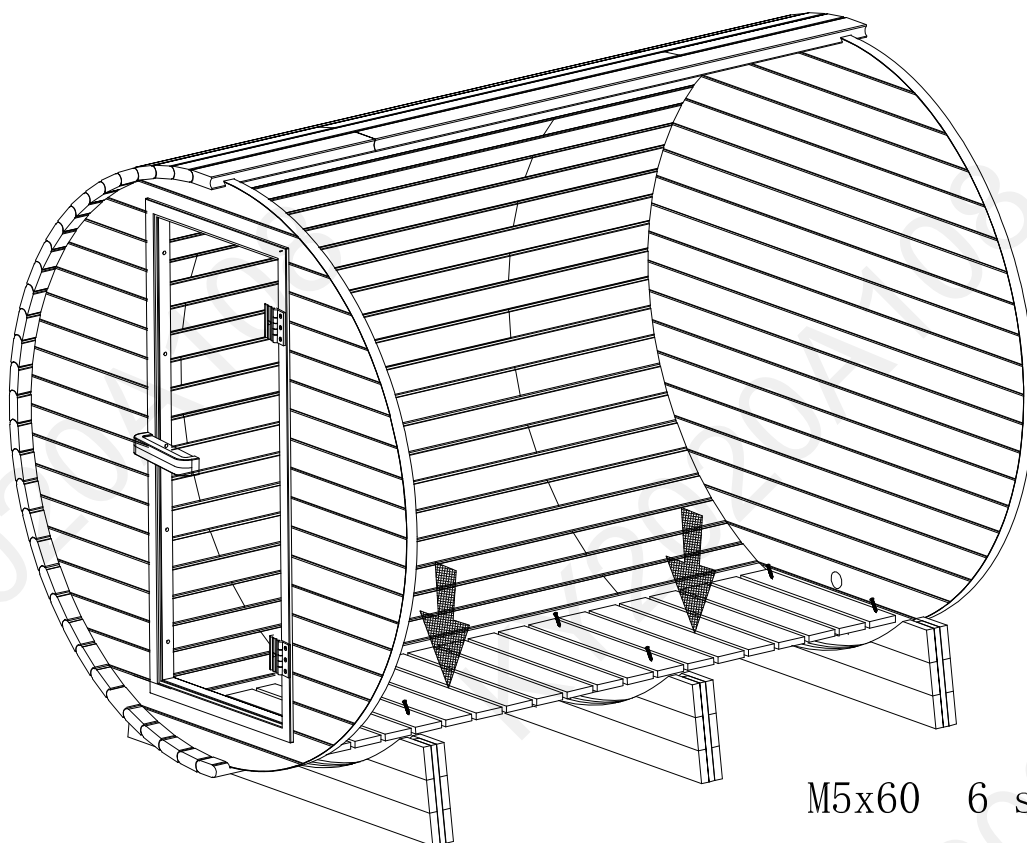


M5x60 6 sets


30.

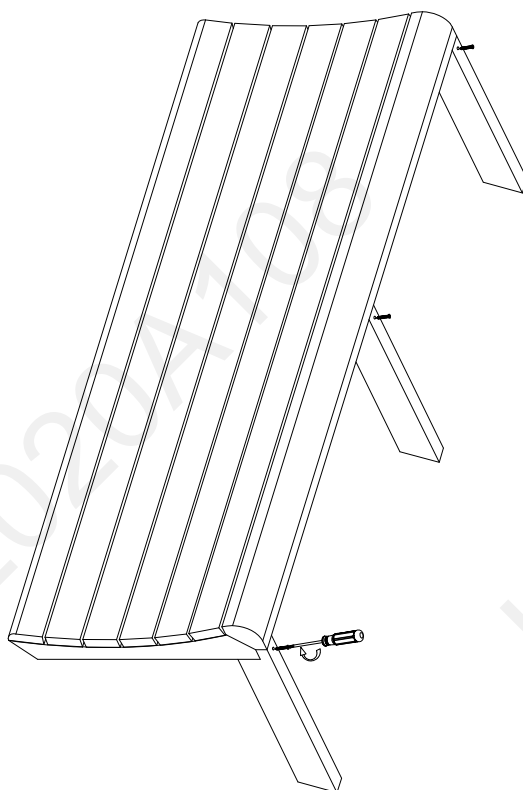


31.

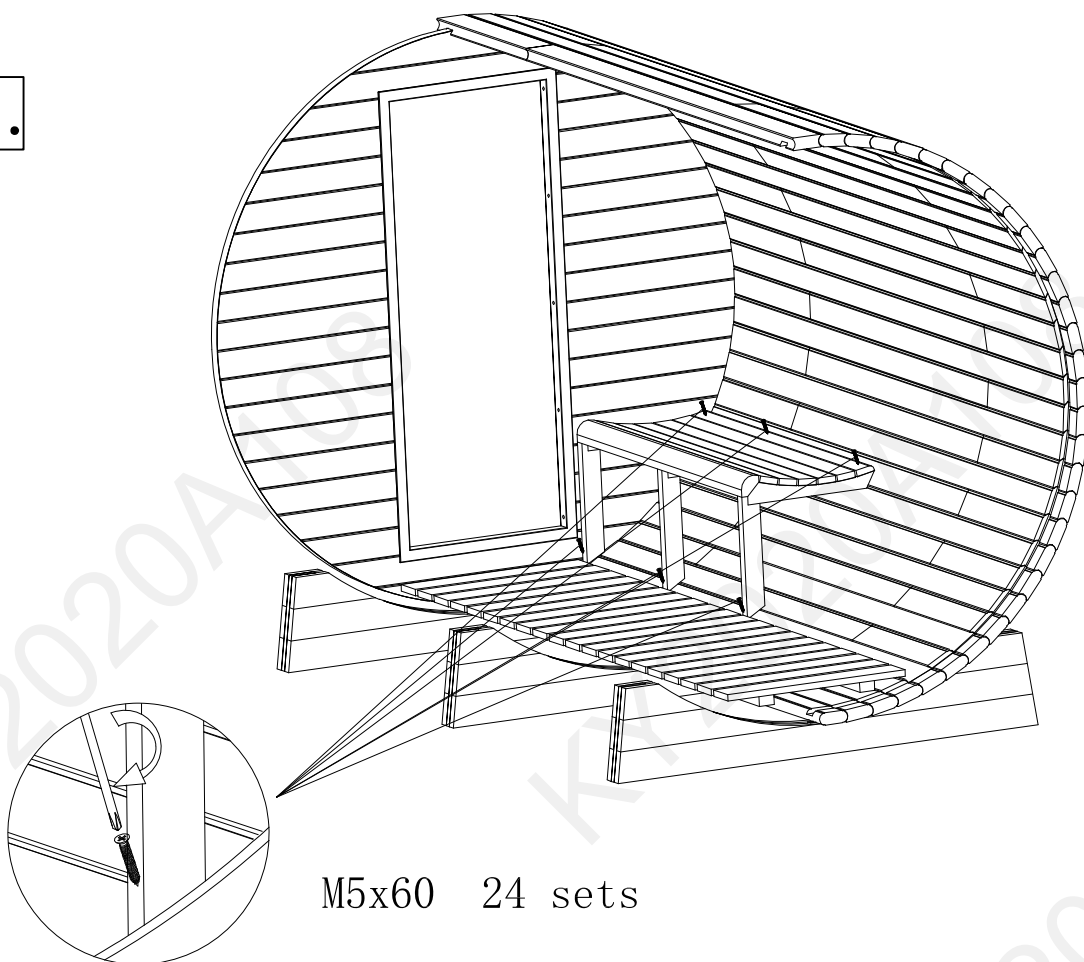


32.

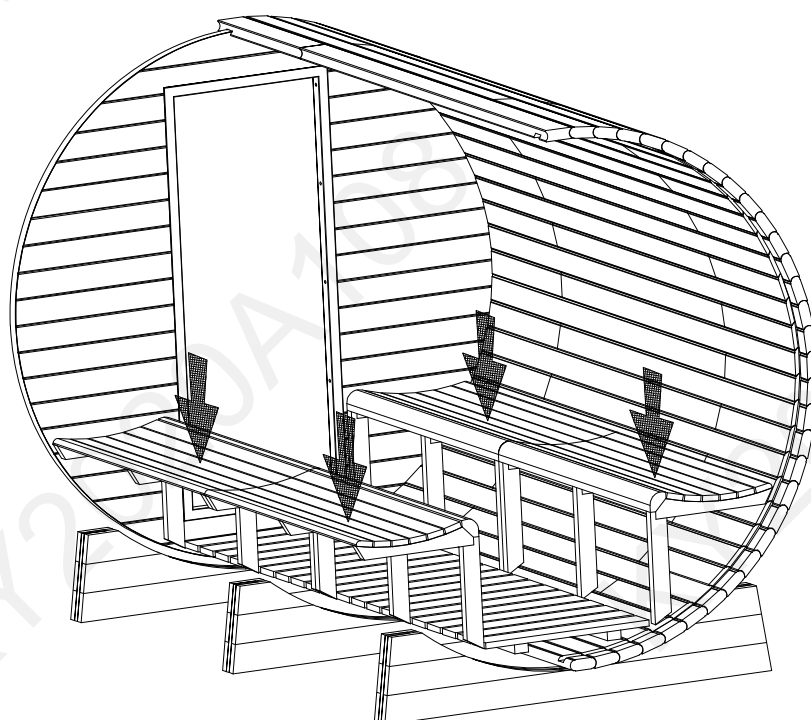


33.

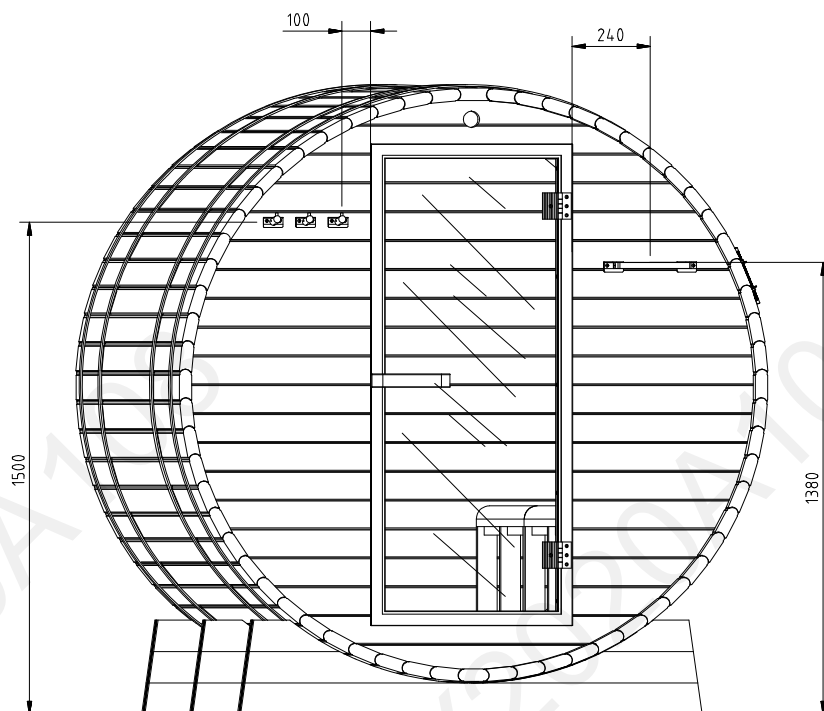


M4x35 12 sets

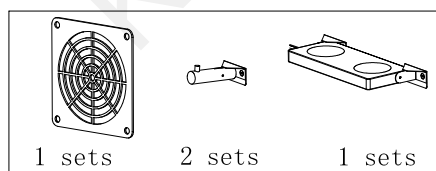

34.

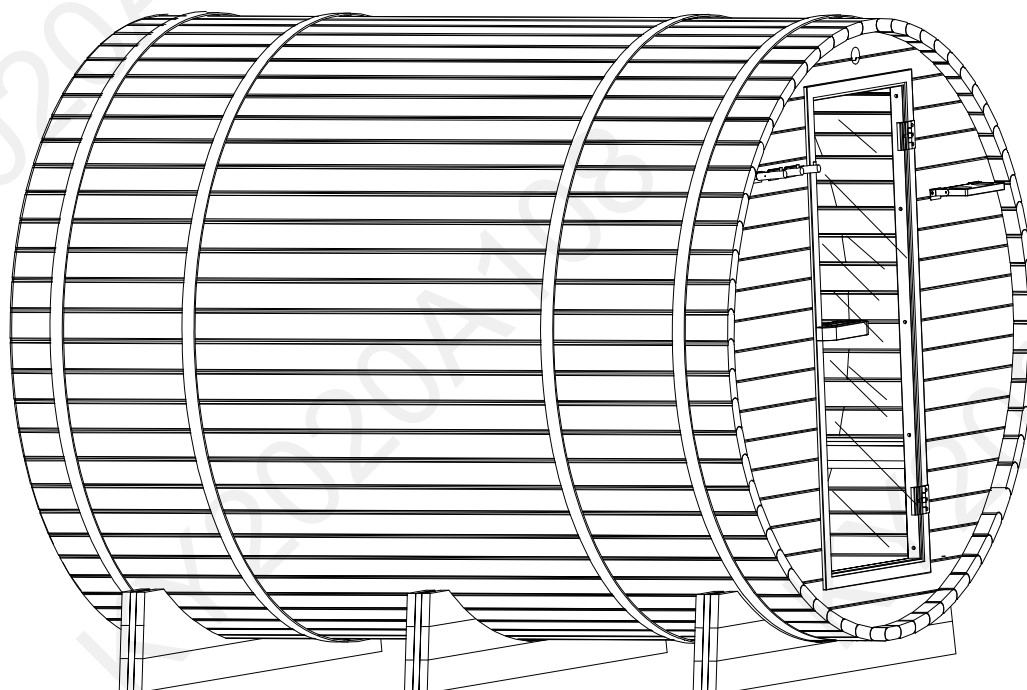


35.

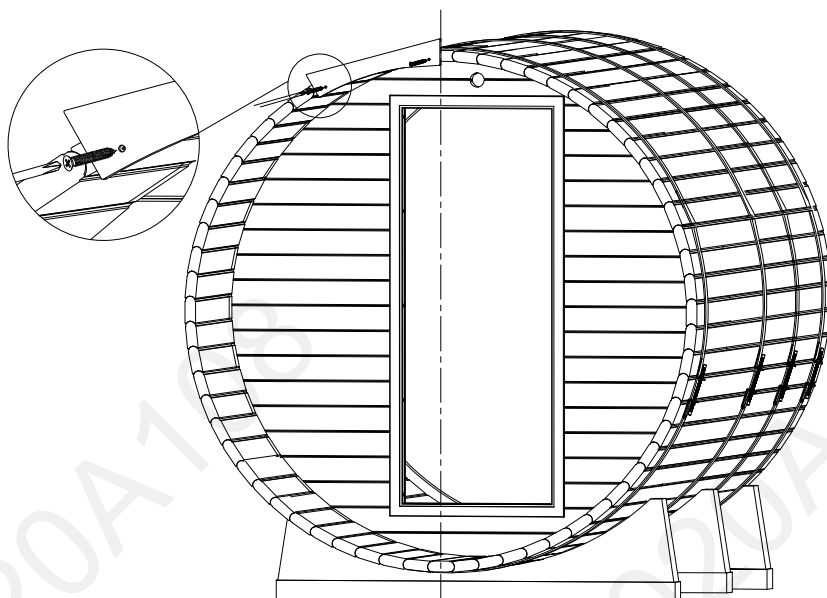

Note:


The eaves are installed (equipped with) only when the roof of the sauna room is covered with fiberglass bitumen tiles.

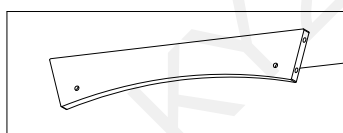

Eaves


ASPHALT TILE 9-1

36.

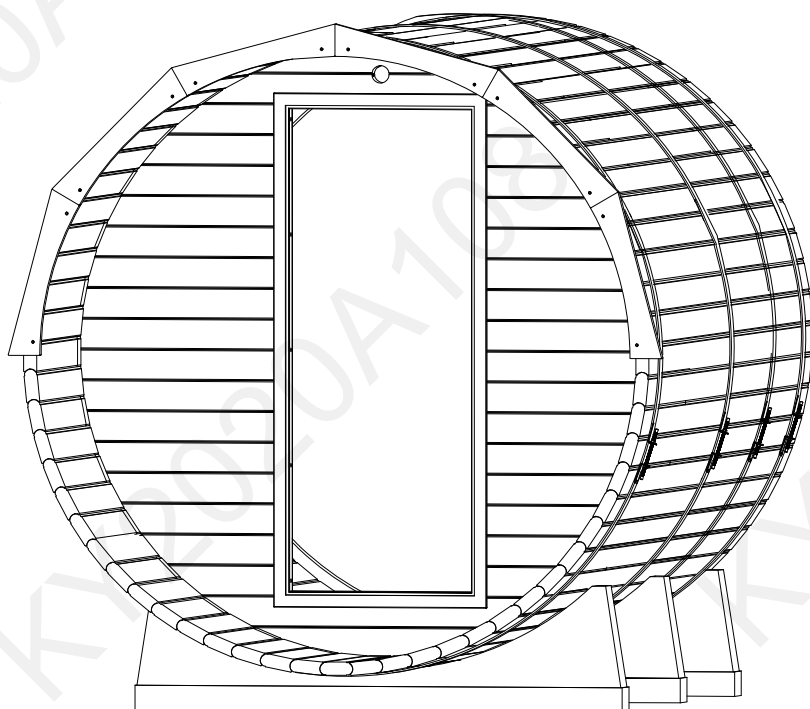



ASPHALT TILE 9-2

37.

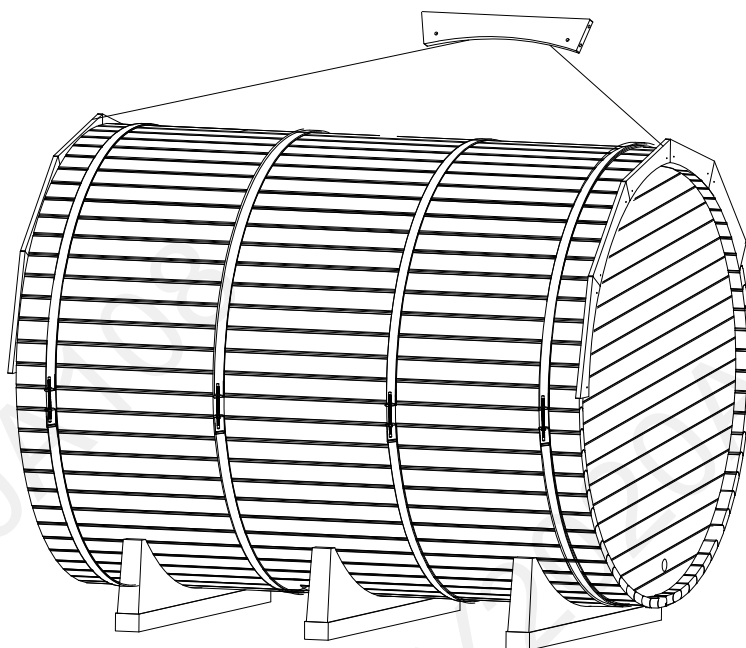


ASPHALT TILE 9-3

38.

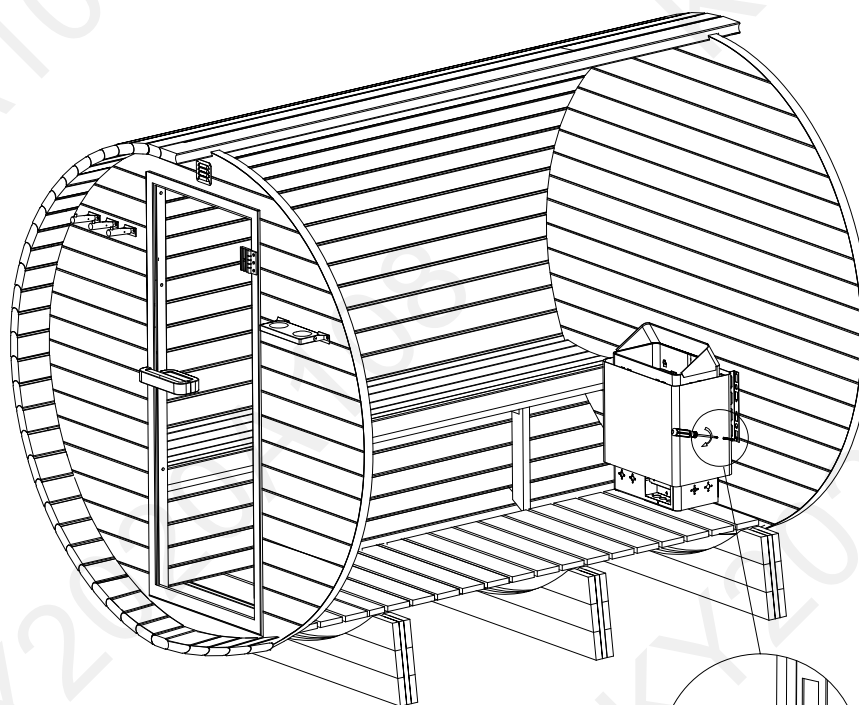




Note:

The sauna room purchased does not include a sauna heater.
(The sauna heater need to be purchased separately)



STOVE 2-1

39.

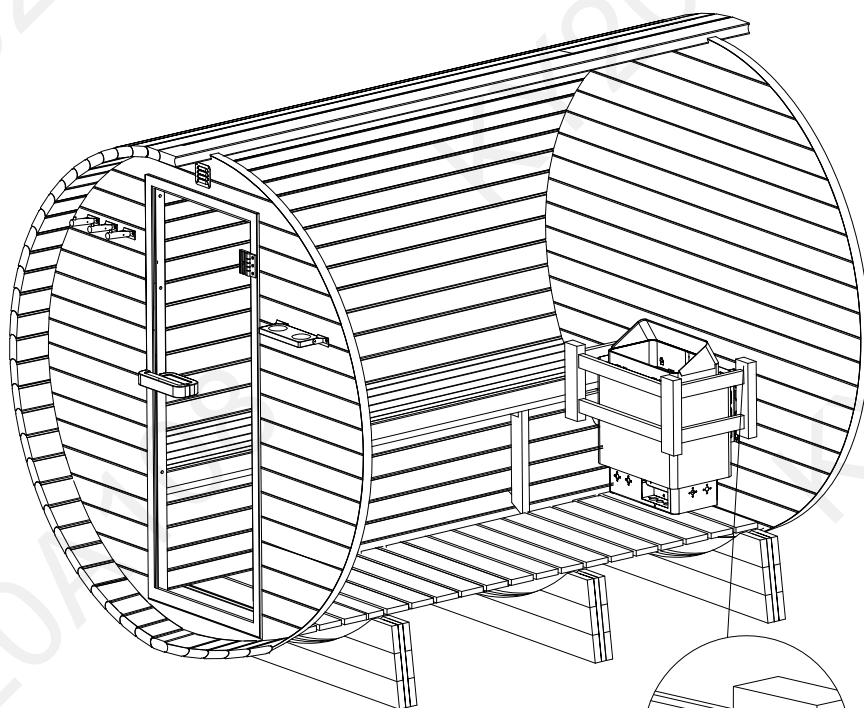

STOVE 2-2